


# MiniTank Series


# MiniTank water heaters

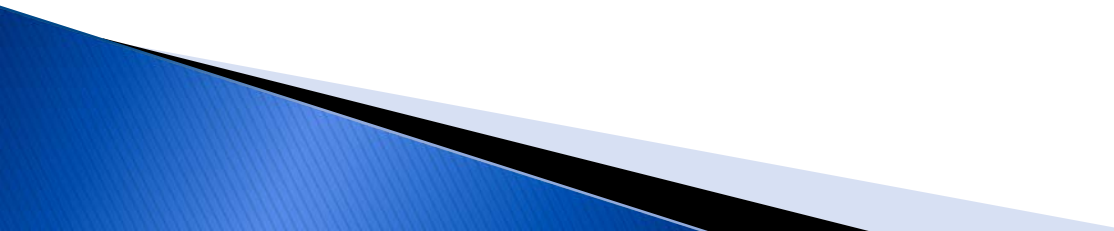

# Features

- ▶ Models EMT2.5 and EMT4 are designed to supply hot water for all hand wash and kitchen sinks in a residential, commercial or industrial environment
  - ▶ All Eemax Minitanks plug directly into a standard 120 volt outlet
- 

# Benefits

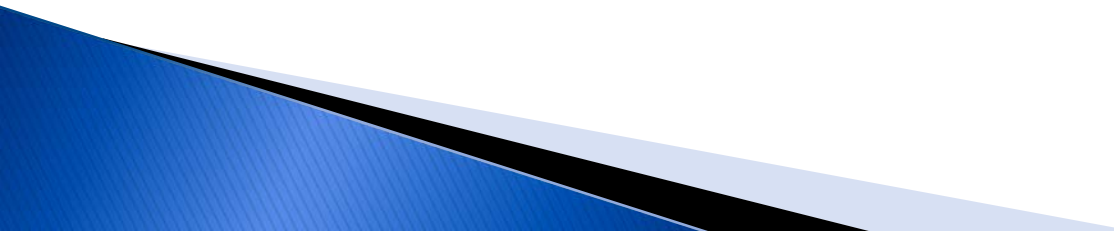- ▶ Can be used in most under the counter point of use applications
  - ▶ Lightweight and compact
  - ▶ Manufactured for easy installation
- 

# The Specs


Lightweight and compact, all Eemax mini-tanks plug directly into a standard 120 volt outlet. (Includes T&P valve)



## The Cure for the Cold Water Sandwich

### EMT1, EMT2.5, EMT4 & EMT6

- Voltage: 120 volts
- Amperage: 12 amps
- Heating Capacity: 1440 watts
- Phase: Single
- Temperatures: 50°-140°F
- Max Operating Pressure : 150 psi

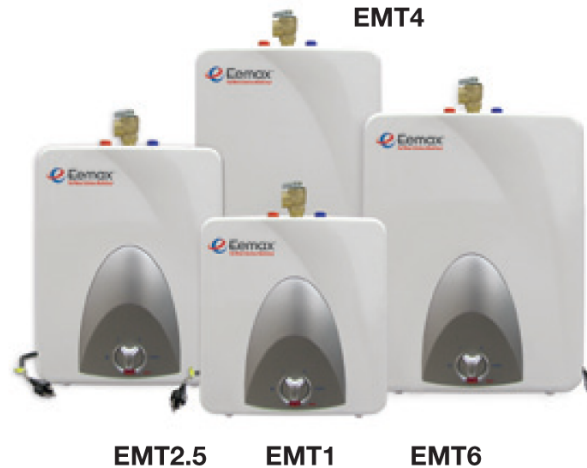

### RECOVERY TIME BASED ON A 60°F TEMPERATURE RISE

- EMT1 . . . . . 8 minutes
- EMT2.5 . . . . 15 minutes
- EMT4 . . . . . 24 minutes
- EMT6 . . . . . 37 minutes

**NEW**

**NEW**

SPECIFICATIONS	EMT1	EMT2.5	EMT4	EMT6
Tank Volume	1.3 gallons	2.5 gallons	4 gallons	6 gallons
Dimensions	12.5" H x 11" W x 10" D	14 <sup>1</sup> / <sub>2</sub> " H x 11 <sup>3</sup> / <sub>4</sub> " W x 10 <sup>3</sup> / <sub>8</sub> " D	19 <sup>1</sup> / <sub>4</sub> " H x 11 <sup>3</sup> / <sub>4</sub> " W x 10 <sup>3</sup> / <sub>8</sub> " D	18" H x 15 <sup>3</sup> / <sub>4</sub> " W x 15 <sup>1</sup> / <sub>2</sub> " D
Water Connections	1/2 inch NPT	1/2 inch NPT	1/2 inch NPT	3/4 inch NPT
Relief Valve	included	included	included	included
Shipping weight	12.5 lbs	20 lbs	24 lbs	26 lbs
Plug in	Yes	Yes	Yes	Yes

# Applications

- ▶ Point of use
- ▶ Sinks in all environments
- ▶ A solution to the “cold water sandwich”