


# Series THREE


# Series THREE

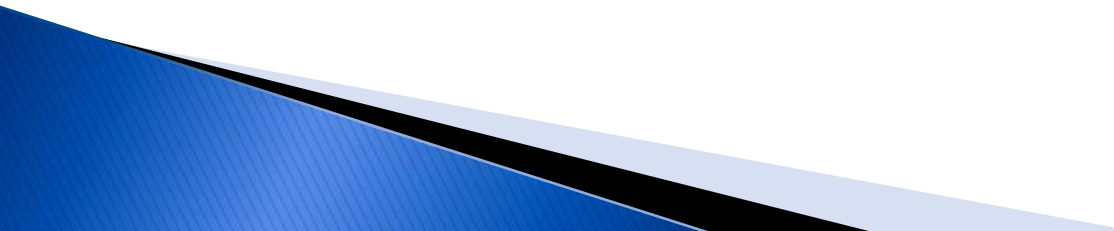

# Features

- ▶ Engineered to turn on in stages
  - ▶ Regulates power to required flow
  - ▶ LEED certified
- 

# Benefits

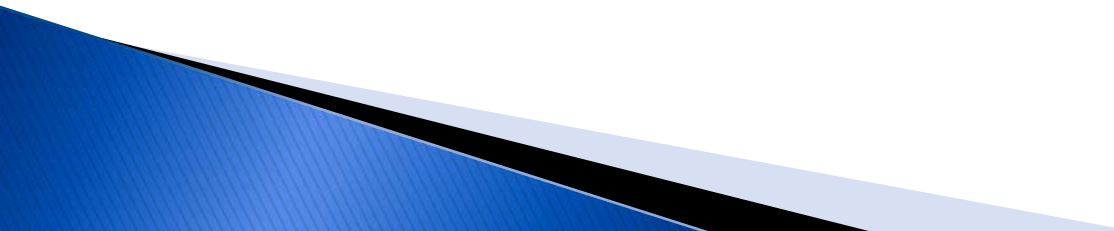- ▶ Sophisticated thermostat delivers precise outlet temp
  - ▶ Designed for durability
- 

# The Specs

- Self-modulating triple-staged heating modules
- Thermostatic temperature control
- 3/4" NPT water connections
- Thermal cut out



MODEL	TURN ON OPTIONS	VOLTS	kW	AMPS	TEMPERATURE RISE °F				RECOMMENDED WIRE SIZE (CU)
					2.5 GPM	3.0 GPM	4.0 GPM	5.0 GPM T3 ONLY	
EX280	T2T,T3	240V*	28.5kW	120 (3x40)A	76°	65°	49°	38°	8AWG per module

\*240V units can be used on 208V with 25% reduced temperature output

- Spec Options**
- **T2T = Thermostatic (staged turn on)** activates 0.7 GPM, max flow 4 GPM.
  - **T3 = Thermostatic (parallel turn on)** activates 1.8 GPM, max flow 5 GPM.
  - **ML = Multi-Lav.** Factory preset to 110°F with 0.3 GPM turn-on.
  - **S = Sanitation.** Factory preset at not to exceed temperature of 180°F.
  - **FS = Factory Set.** Customer specified factory-set not to exceed temperature ambient to 180°F.

**Heater Weight** • Approximately 15 lbs.

- NEMA Options**
- **NEMA 4** = Optional waterproof cabinet – hinged cover. Powder coated finish.
  - **NEMA 4x** = Optional stainless steel waterproof corrosion-resistant cabinet.

# Applications

- ▶ Whole house
- ▶ Multi fixture 4 GPM
- ▶ Can handle up to two showers at a time